



ULTIMO 

 Room 601, NO.1 Building, Artificial intelligence Industrial park, Binjiang District, Hangzhou, Zhejiang, China, 310052

 0086-571-89779077

 www.ultimo-lighting.com


 sherry.wu@ultimo-lighting.com

2022-2023

LED NIGHT LIGHT

LED NIGHT LIGHT

AC TYPE

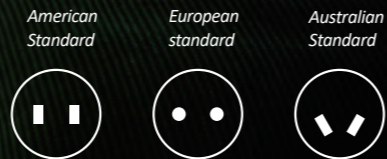

NLA01

NIGHT LIGHT



Features	
Item.	NLA01
Input voltage	120V/230V/240V
Power	0.3W/0.28W/0.3W
Ra	>80
IP	20
CCT	3000K/4000K
Luminous flux	2~3lm
Functions	Day Night Sensor
Materials	PC
Life time	25000 hrs
Dimension	☺ 90x60x39.4mm
	☹ 90x60x53.3mm
	☺ 90x60x41.7mm



Light sense



LED





American Standard



European standard



Australian Standard

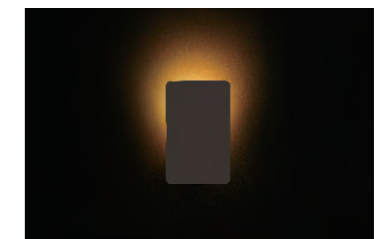

NLA02

NIGHT LIGHT




Features

Item.	NLA02
Input voltage	230V/240V
Power	0.28W/0.3W
Ra	>80
IP	20
CCT	3000K/4000K
Luminous flux	2~3lm
Functions	Day Night Sensor
Materials	PC
Life time	25000 hrs
Dimesion	⊕ 84.7x60x51.9mm ⊖ 84.7x60x34.2mm



SAA



Light sense LED




European standard Australian Standard

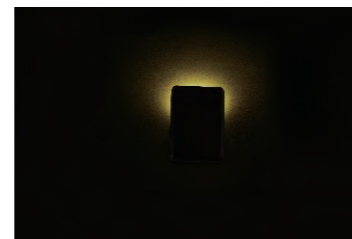

NLA04

NIGHT LIGHT



Sense distance: 3-5m
Sense Angle: 120°
Sense duration: 20S

Features

Item.	NLA04
Input voltage	120V/230V/240V
Power	0.45W/0.6W/0.6W
Ra	>80
IP	20
CCT	3000K/4000K
Luminous flux	10lm
Functions	Day Night Sensor+Motion sense
Materials	PC
Life time	25000 hrs
Dimesion	⊕ 89.9x54.8x52.9mm ⊖ 89.9x54.8x72.8mm ⊕ 90.1x60x57.8mm



CE RoHS UL SAA



Light sense Motion sense LED



American Standard European standard Australian Standard

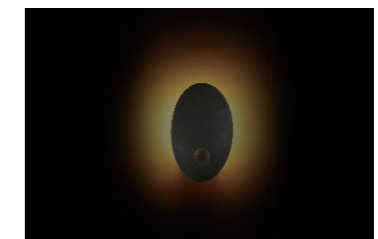

NLA05

NIGHT LIGHT




CE RoHS UL



Light sense LED



American Standard European standard




NLA07

NIGHT LIGHT





CE RoHS UL



Light sense LED



American Standard European standard

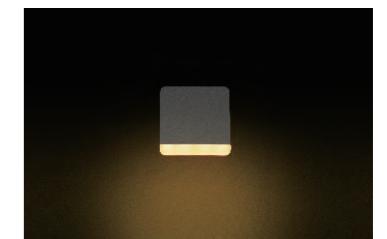

Features


Item.	NLA05
Input voltage	120V/230V
Power	0.3W/0.28W
Ra	>80
IP	20
CCT	3000K/4000K
Luminous flux	2~3lm
Functions	Day Night Sensor
Materials	PC
Life time	25000 hrs
Dimesion	⊕ 82.8x90.7x45.7mm ⊖ 82.8x90.7x68.5mm / 82.8x90.7x51.6mm

Features

Item.	NLA07
Input voltage	120V/230V
Power	0.3W/0.28W
Ra	>80
IP	20
CCT	3000K/4000K
Luminous flux	2~3lm
Functions	Day Night Sensor
Materials	PC
Life time	25000 hrs
Dimesion	⊕ 62x62x35.6mm ⊖ 62x62x56.2mm

NLA08

NIGHT LIGHT



Sense distance: 3-5m
Sense Angle: 120°
Sense duration: 20S

Features

Item.	NLA08
Input voltage	120V/230V
Power	0.45W/0.6W
Ra	>80
IP	20
CCT	3000K/4000K
Luminous flux	10lm
Functions	Day Night Sensor + Motion sense
Materials	PC
Life time	25000 hrs
Dimesion	⊕ 62x62x43.9mm ⊖ 62x62x64.5mm



Light sense



Motion sense





LED



American Standard



European standard

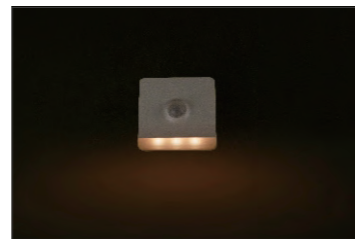

NLA09

NIGHT LIGHT



CE RoHS UL



Light sense



LED





American Standard



European standard



Australian Standard

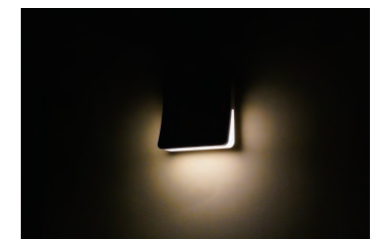

Features

Item.	NLA09
Input voltage	120V/230V/240V
Power	0.3W/0.28W/0.3W
Ra	>80
IP	20
CCT	3000K/4000K
Luminous flux	2~3lm
Functions	Day Night Sensor
Materials	PC
Life time	25000 hrs
Dimesion	⊕ 60x60x46.4mm ⊖ 60x60x69mm ⊖ 60x60x38mm

NLA11

NIGHT LIGHT



Features	
Item.	NLA11
Input voltage	120V/230V
Power	0.3W/0.28W
Ra	>80
IP	20
CCT	3000K/4000K
Luminous flux	2~3lm
Functions	ON/Off+Day Night Sensor
Materials	PC
Life time	25000 hrs
Dimesion	⌀70.6x40.8mm ⌀70.6x60mm


CE RoHS UL



Light sense LED



American Standard European standard



NLA14

NIGHT LIGHT



Features	
Item.	NLA14
Input voltage	120V/230V/240V
Light Power	0.17W/0.2W/0.2W
USB Power	13W
Ra	>80
IP	20
CCT	3000K
Luminous flux	2~3lm
Functions	Day Night Sensor+USB
Materials	PC
Life time	25000 hrs
Dimesion	⌀90x56.9mm ⌀90x80.2mm ⌀90x65.5mm


CE RoHS UL



Light sense LED



American Standard European standard Australian Standard



UV Light Recommended Uses

See what you've been missing. Makes scorpions glow



NLA24 NIGHT LIGHT



Sense distance: 2-3m
Sense Angle: 120°
Sense duration: 20S



Features	
Item.	NLA24 (UV-A light)
Input voltage	120V/230V
Power	2W max
Ra	>80
IP	20
CCT	3000K
Luminous flux	10lm
Functions	ON/OFF+Day Night Sensor+Emergency
Materials	PC+ABS
Life time (on model)	3hrs
Dimesion	60x60x122mm



Light sense Motion sense LED



American Standard European standard Emergency

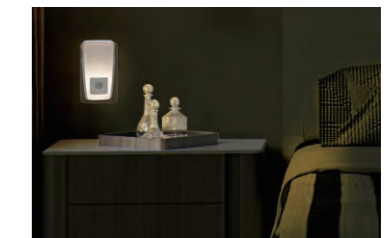



NIGHT LIGHT WITH DOOR BELL

NLA26

NIGHT LIGHT WITH DOOR BELL



NLA26



NLA26-RF433



Light sense



LED



Door bell



European standard





Australian Standard



36 different kinds of music to choose



Volume adjustment

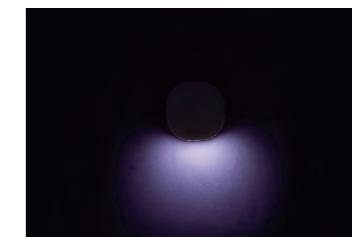

Features		
Item.	NLA26	NLA26-RF433
Input voltage	230V/240V	CR2032
Power	0.5W(night light)	/
Ra	>80	/
IP	20	54
CCT	4000K	/
Luminous flux	3lm	/
Functions	Day Night Sensor	Remote control distance>50m
Materials	PC	PC
Life time	25000 hrs	25000 hrs
Dimesion	⊙ 65x65x58mm	37x37x11.6mm


LED NIGHT LIGHT

DC TYPE



NLD02

NIGHT LIGHT



Sense distance: 3-5m
Sense Angle: 120°
Sense duration: 20S

Features

Item.	NLD02
Input voltage	3 x AA batteries
Power	0.55W
Ra	>80
IP	54
CCT	3000K/4000K
Luminous flux	40lm
Functions	Day Night Sensor+Motion Sense
Materials	PC+ABS
Battery life time (On mode)	25 hours
Battery life time (Auto mode)	200 days

CP65 LM79



Light sense Motion sense LED



Multiple mounting options Multiple strip install

NLD05

NIGHT LIGHT



Sense distance: 3-5m
Sense Angle: 120°
Sense duration: 20S

Features

Item.	NLD05
Input voltage	3 x AAA batteries
Power	0.3W
Ra	>80
IP	20
CCT	3000K/4000K
Luminous flux	10lm
Functions	Day Night Sensor+Motion Sense
Materials	PC+ABS
Color	White
Battery life time (On mode)	25 hours
Battery life time (Auto mode)	200 days


CE RoHS CP65



Light sense Motion sense LED




Multiple mounting options



NLD06

NIGHT LIGHT



Sense distance: 3-5m
Sense Angle: 110°
Sense duration: 20S

Features

Item.	NLD06
Input voltage	3 x AAA batteries
Power	0.4W
Ra	>80
IP	20
CCT	3000K/4000K
Luminous flux	10lm
Functions	Day Night Sensor+Motion Sense
Materials	PC+ABS
Color	White
Battery life time (On mode)	25 hours
Battery life time (Auto mode)	200 days


CP65



Light sense Motion sense LED

NLD07


NIGHT LIGHT



Sense distance: 3-5m
Sense Angle: 120°
Sense duration: 20S

Features

Item.	NLD07
Input voltage	3 x AAA batteries
Power	0.25W
Ra	>80
IP	54
CCT	3000K/4000K
Luminous flux	10lm
Functions	Day Night Sensor+Motion Sense
Materials	PC+ABS
Color	White
Battery life time (On mode)	25 hours
Battery life time (Auto mode)	200 days



CE RoHS CP65


LM79



Light sense Motion sense LED




Metal mounting strip install

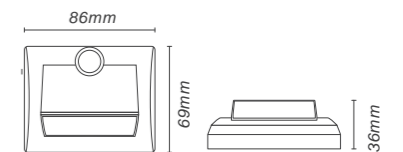

NLD09

NIGHT LIGHT



Sense distance: 3-5m
Sense Angle: 110°
Sense duration: 20S

Features

Item.	NLD09
Input voltage	3 x AAA batteries
Power	0.25W
Ra	>80
IP	54
CCT	3000K/4000K
Luminous flux	10lm
Functions	Day Night Sensor+Motion Sense
Materials	PC+ABS
Color	White/Grey
Battery life time (On mode)	25 hours
Battery life time (Auto mode)	200 days



CP65



Light sense Motion sense LED



Metal mounting strip install

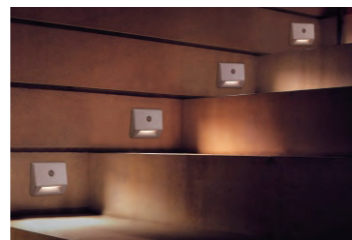

NLD16

NIGHT LIGHT



Sense distance: 3-5m
Sense Angle: 120°
Sense duration: 60S

Features

Item.	NLD16
Input voltage	3 x AAA batteries
Power	0.1W
Ra	>60
IP	20
CCT	Amber+RGB
Luminous flux	5lm
Functions	On/Off+Motion Sense
Materials	PC+ABS
Battery life time (On mode)	100 hours
Battery life time (Auto mode)	360 days



Motion sense LED



Multiple mounting options

