

ULTIMO



Room 601, NO.1 Building, Artificial intelligence Industrial park, Binjiang District, Hangzhou, Zhejiang, China, 310052



0086-571-89779077



www.ultimo-lighting.com



sherry.wu@ultimo-lighting.com



2023-2024

LED GARDEN LIGHT

>>> CONTENTS



PLASTIC GARDEN LIGHT >

OUTDOOR STEP LIGHT

Page 01-05



OUTDOOR WALL LIGHT

Page 06-14



OUTDOOR BULKHEAD

Page 15-19



OUTDOOR CEILING LIGHT

Page 20-23




OUTDOOR GARDEN SPIKE

Page 24-26




OUTDOOR BOLLARD LIGHT

Page 27-28

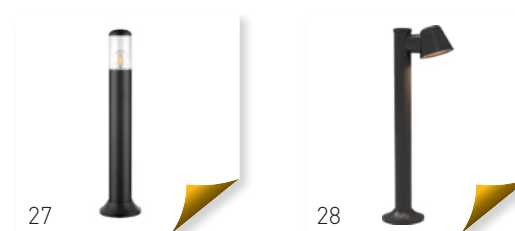

OUTDOOR WALL LANTERN

Page 29-32

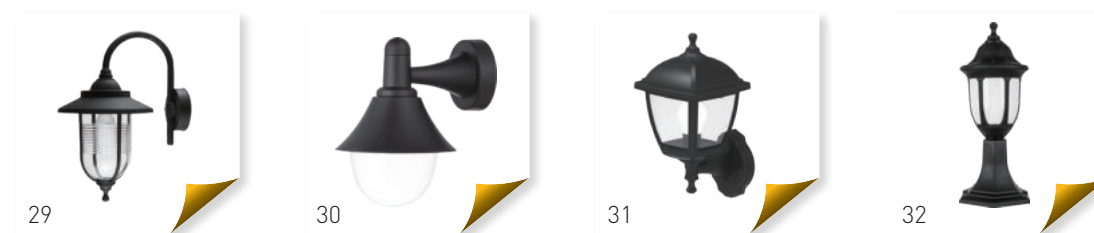


>>> CONTENTS



METAL
GARDEN LIGHT


>>> CONTENTS



OUTDOOR
STEP LIGHT



OUTDOOR
STEP LIGHT



PC1351



PC1201



PC1509




P1251



P1501


- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

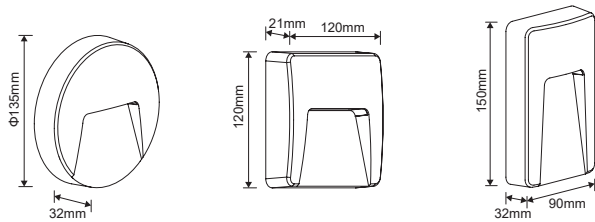

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

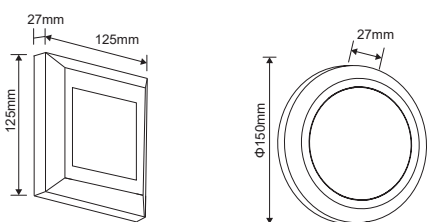

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PC1351	3W	100lm	3000/4000/6500K	AC220-240V	Φ135x32mm	Non-isolated
PC1201	3W	100lm	3000/4000/6500K	AC220-240V	120x21x120mm	Non-isolated
PC1509	3W	100lm	3000/4000/6500K	AC220-240V	90x32x150mm	Non-isolated



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P1251	3.8W	280lm	3000/4000/6500K	AC220-240V	125x27x125mm	Non-isolated
P1501	3.8W	280lm	3000/4000/6500K	AC220-240V	Φ150x27mm	Non-isolated

OUTDOOR
STEP LIGHT



OUTDOOR
STEP LIGHT



P2301




P2302



PC2551

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

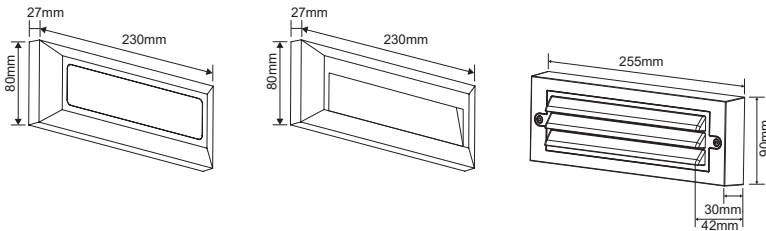

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P2301	3.8W	280lm	3000/4000/6500K	AC220-240V	230x80x27mm	Non-isolated
P2302	1.8W	85lm	3000/4000/6500K	AC220-240V	230x80x27mm	Non-isolated
PC2551	6W	120lm	3000/4000/6500K	AC220-240V	255x30x90mm	Non-isolated



P1001




P1601



P1201

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

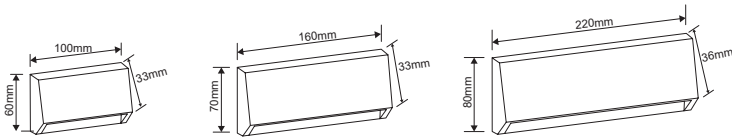

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P1001	1.5W	100lm	3000/4000/6500K	AC220-240V	100x60x33mm	Non-isolated
P1601	3W	200lm	3000/4000/6500K	AC220-240V	160x70x33mm	Non-isolated
P1201	3.8W	250lm	3000/4000/6500K	AC220-240V	220x80x36mm	Non-isolated

OUTDOOR
STEP LIGHT




PW2202-A



PC2002

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

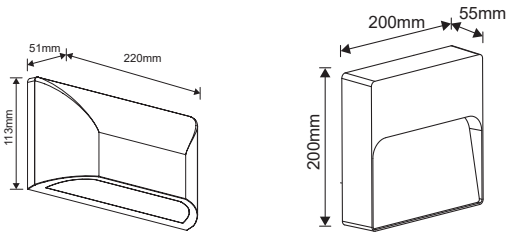

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PW2202-A	6W	300lm	3000/4000/6500K	AC220-240V	220x113x51mm	Non-isolated
PC2002	6W	200lm	3000/4000/6500K	AC220-240V	200x200x55mm	Isolated

OUTDOOR
WALL LIGHT




PW1651



PW1503

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

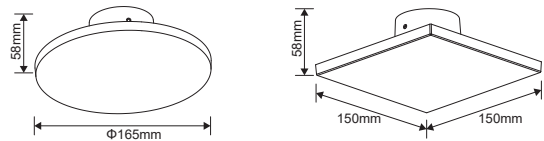


Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PW1651	8W	600lm	3000/4000/6500K	AC220-240V	Φ165x58mm	Isolated
PW1503	8W	600lm	3000/4000/6500K	AC220-240V	150x150x58mm	Isolated

OUTDOOR
WALL LIGHT



PW2040

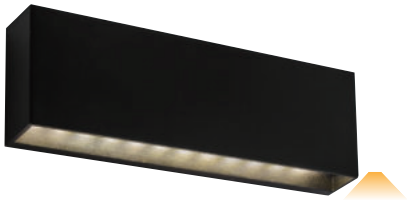

PW2401






PW2080



PW2081

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PW2040	12W	700lm	3000/4000/6500K	AC220-240V	200x125x39mm	Isolated
PW2401	6W	400lm	3000/4000/6500K	AC220-240V	240x80x41mm	Isolated
PW2080	6W	300lm	3000/4000/6500K	AC220-240V	208x125x115mm	Isolated
PW2081	12W	600lm	3000/4000/6500K	AC220-240V	208x125x115mm	Isolated


OUTDOOR
WALL LIGHT



PW3008

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

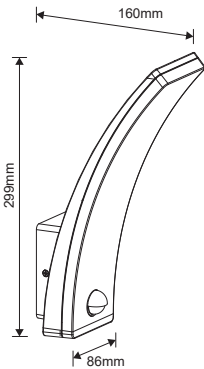

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PW3008	13W	800lm	3000/4000/6500K	AC220-240V	86x160x299mm	Isolated

OUTDOOR
WALL LIGHT



PS1503



PS1504




PS2003



PS2004

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

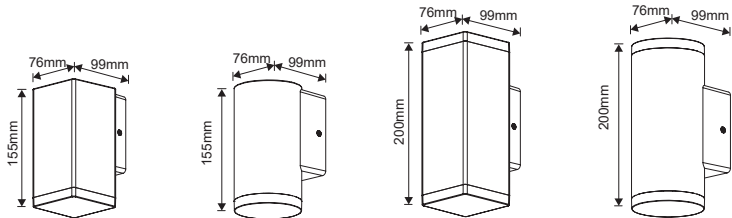

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PS1503	4W	180lm	3000/4000/6500K	AC220-240V	76x155x99mm	Isolated
PS1504	4W	180lm	3000/4000/6500K	AC220-240V	76x155x99mm	Isolated
PS2003	2x4W	350lm	3000/4000/6500K	AC220-240V	76x200x99mm	Isolated
PS2004	2x4W	350lm	3000/4000/6500K	AC220-240V	76x200x99mm	Isolated

OUTDOOR
WALL LIGHT



PS1503-1-GU10



PS1504-1-GU10




PS2003-2-GU10



PS2004-2-GU10

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

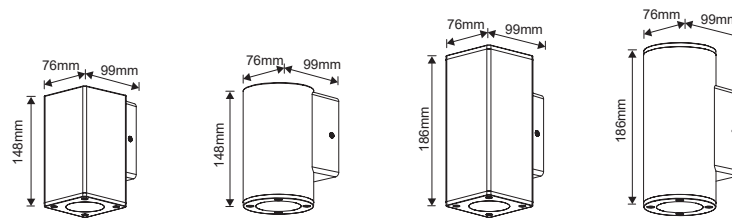

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PS1503-1-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	76x148x99mm	n/a
PS1504-1-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	76x148x99mm	n/a
PS2003-2-GU10	2xGU10 MAX. 7W	n/a	n/a	AC220-240V	76x186x99mm	n/a
PS2004-2-GU10	2xGU10 MAX. 7W	n/a	n/a	AC220-240V	76x186x99mm	n/a

OUTDOOR
WALL LIGHT



PS1603-1-GU10



PS1604-1-GU10




PS2203-2-GU10



PS2204-2-GU10

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

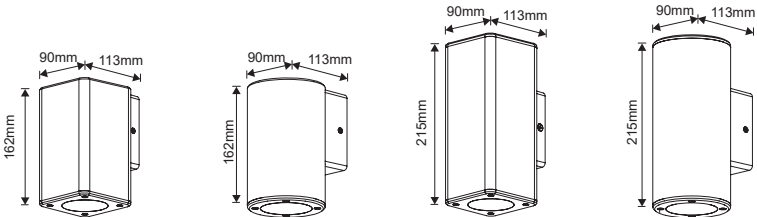

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PS1603-1-GU10	GU10 MAX. 9W	n/a	n/a	AC220-240V	90x162x113mm	n/a
PS1604-1-GU10	GU10 MAX. 9W	n/a	n/a	AC220-240V	90x162x113mm	n/a
PS2203-2-GU10	2xGU10 MAX. 9W	n/a	n/a	AC220-240V	90x215x113mm	n/a
PS2204-2-GU10	2xGU10 MAX. 9W	n/a	n/a	AC220-240V	90x215x113mm	n/a

OUTDOOR
WALL LIGHT




P1602-GU10



P1600-GU10

- PP housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

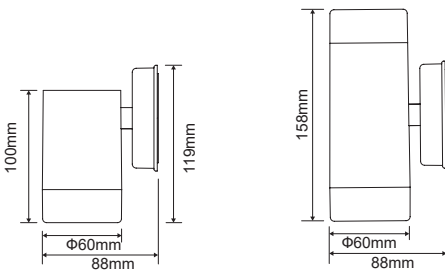

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P1602-1-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	60x100x88mm	n/a
P1600-1-GU10	2xGU10 MAX. 7W	n/a	n/a	AC220-240V	60x158x88mm	n/a

OUTDOOR
WALL LIGHT



PS0980-GU10



PS0970-GU10




PS1680-GU10



PS1670-GU10

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

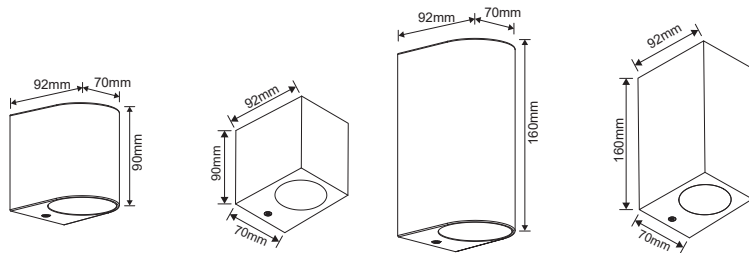

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PS0980-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	70x90x92mm	n/a
PS0970-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	70x90x92mm	n/a
PS1680-GU10	2xGU10 MAX. 7W	n/a	n/a	AC220-240V	70x160x92mm	n/a
PS1670-GU10	2xGU10 MAX. 7W	n/a	n/a	AC220-240V	70x160x92mm	n/a

OUTDOOR
WALL LIGHT



247 PP



247-2 PP



247 F PP



247 F-2 PP

- Plastic housing & PC diffuser.
- UV resistant.
- Anti-corrosion.

Available color:



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
247 PP	GU10 MAX.7W	n/a	n/a	AC220-240V	88x67x80mm	n/a
247-2 PP	2xGU10 MAX.7W	n/a	n/a	AC220-240V	88x67x153mm	n/a
247 F PP	GU10 MAX.7W	n/a	n/a	AC220-240V	88x67x80mm	n/a
247 F-2 PP	2xGU10 MAX.7W	n/a	n/a	AC220-240V	88x67x153mm	n/a

OUTDOOR
BULKHEAD




P2541-E27



P2121-E27

- PP housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

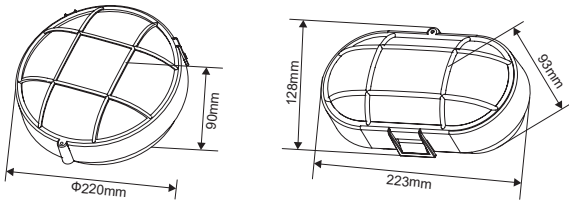

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P2541-E27	E27 MAX. 40W	n/a	n/a	AC220-240V	Φ220x90mm	n/a
P2121-E27	E27 MAX. 40W	n/a	n/a	AC220-240V	223x128x93mm	n/a

OUTDOOR
BULKHEAD



PW2311-1



PW2311-2




PW2311-3



PW2311-4

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

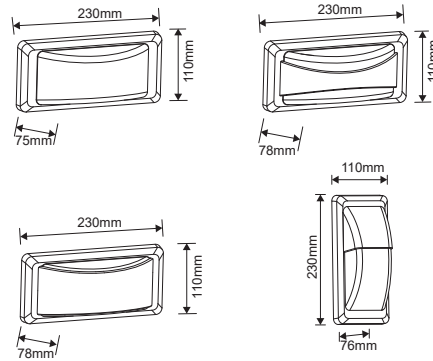


Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PW2311-1	10.5W	1100lm	3000/4000/6500K	AC220-240V	230x110x75mm	Isolated
PW2311-2	10.5W	650lm	3000/4000/6500K	AC220-240V	230x110x78mm	Isolated
PW2311-3	10.5W	300lm	3000/4000/6500K	AC220-240V	230x110x78mm	Isolated
PW2311-4	10.5W	700lm	3000/4000/6500K	AC220-240V	230x110x76mm	Isolated

OUTDOOR
BULKHEAD



- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

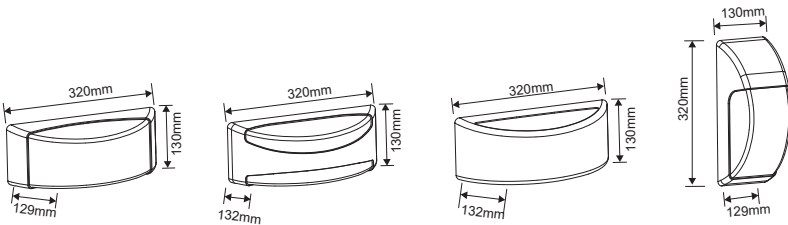


Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PW3213-1	13.8W	1000lm	3000/4000/6500K	AC220-240V	320x130x129mm	Isolated
PW3213-2	13.8W	700lm	3000/4000/6500K	AC220-240V	320x130x132mm	Isolated
PW3213-3	13.8W	500lm	3000/4000/6500K	AC220-240V	320x130x132mm	Isolated
PW3213-4	13.8W	600lm	3000/4000/6500K	AC220-240V	320x130x129mm	Isolated

OUTDOOR
BULKHEAD



- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

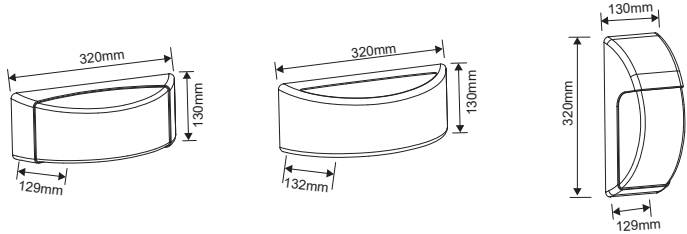

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PW3213-1-E27	E27 MAX. 18W	n/a	n/a	AC220-240V	320x130x129mm	n/a
PW3213-3-E27	E27 MAX. 18W	n/a	n/a	AC220-240V	320x130x132mm	n/a
PW3213-4-E27	E27 MAX. 18W	n/a	n/a	AC220-240V	320x130x129mm	n/a

OUTDOOR
BULKHEAD




PW2251

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

- Black
- White
- Grey
- Dark Grey



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PW2251	12W	1200lm	3000/4000/6500K	AC220-240V	124x96x225mm	Isolated

OUTDOOR
CEILING LIGHT




P9013-GU10

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

- Black
- White
- Grey
- Dark Grey



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P9013-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	94.5x90x140mm	n/a

OUTDOOR
CEILING LIGHT



P25811




P25822



P25833

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P25811	15W	1100lm	3000/4000/6500K	AC220-240V	Φ260x44mm	Non-isolated
P25822	18W	1300lm	3000/4000/6500K	AC220-240V	Φ300x44mm	Non-isolated
P25833	24W	1800lm	3000/4000/6500K	AC220-240V	Φ360x47mm	Non-isolated


OUTDOOR
CEILING LIGHT



P2131-R

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P2131-R	8W	450lm	3000/4000/6500K	AC220-240V	Φ213x82mm	Non-isolated

OUTDOOR
CEILING LIGHT




P3302

- PC+ABS housing & PC diffuser.
- Surface mount.
- UV resistant.
- Anti-corrosion.

Available color:

- Black
- White
- Grey
- Dark Grey



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P3302	18W	1700lm	3000/4000/6500K	AC220-240V	Φ300x85mm	Isolated

OUTDOOR
GARDEN SPIKE



S1602-GU10




S1603-GU10

- PC+ABS housing & PC diffuser.
- UV resistant.
- Anti-corrosion.

Available color:

- Black
- White
- Grey
- Dark Grey

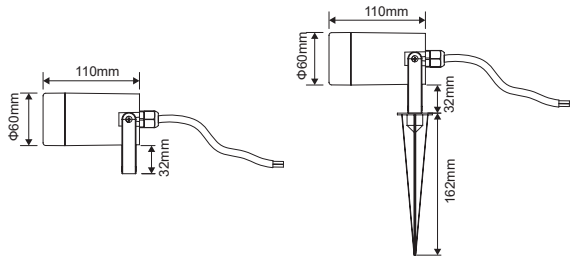

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
S1602-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	60x110x32mm	n/a
S1603-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	60x110x32x162mm	n/a

OUTDOOR
GARDEN SPIKE




S1002-GU10

S1001-GU10

- PC+ABS housing & glass diffuser.
- UV resistant.
- Anti-corrosion.

Available color:

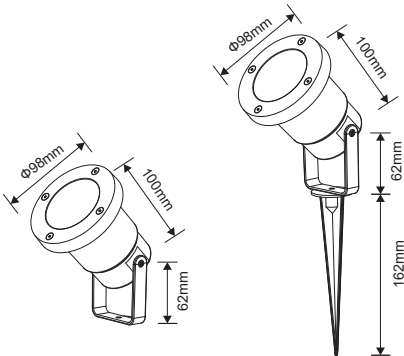

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
S1002-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	98x100x62mm	n/a
S1001-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	98x100x62x162mm	n/a

OUTDOOR
GARDEN SPIKE




S1007-GU10

S1008-GU10

- PC+ABS housing & glass diffuser.
- UV resistant.
- Anti-corrosion.

Available color:

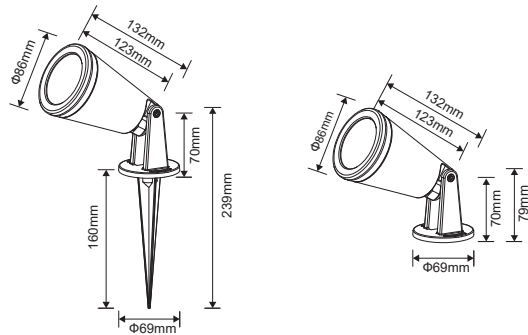

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
S1007-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	Φ86x132x239mm	n/a
S1008-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	Φ86x132x79mm	n/a

OUTDOOR
BOLLARD LIGHT




PL1652-700

PL7001-700-E27

- PP housing & PC diffuser(PL1652-700).
PC+ABS housing & PC diffuser(PL7001-700-E27).
- UV resistant.
- Anti-corrosion.

Available color:



Item	Wattage	Lumen	CCT	IP	Volt	Dimension	Driver
PL1652-700	8W	600lm	n/a	IP54	AC220-240V	Φ165x700mm	n/a
PL7001-700-E27	E27 MAX. 18W	n/a	n/a	IP44	AC220-240V	Φ160x700mm	n/a

OUTDOOR
BOLLARD LIGHT




PW1181-GU10



PL8201-GU10

- PC+ABS housing & PC diffuser.
- UV resistant.
- Anti-corrosion.

Available color:

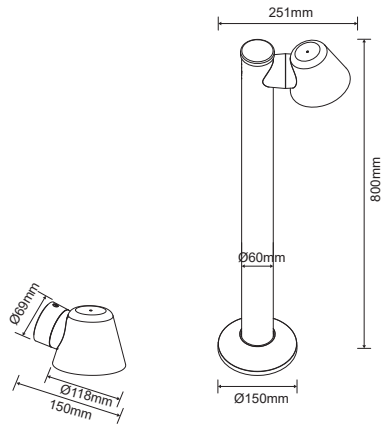

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PW1181-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	69x118x150mm	n/a
PL8201-GU10	GU10 MAX. 7W	n/a	n/a	AC220-240V	150x800x251m	n/a

OUTDOOR
WALL LANTERN




P382-E27



P222-E27

- PP housing & Clear PC diffuser.
- UV resistant material.
- Anti-corrosion.
- Available with different finishes.

Available color:

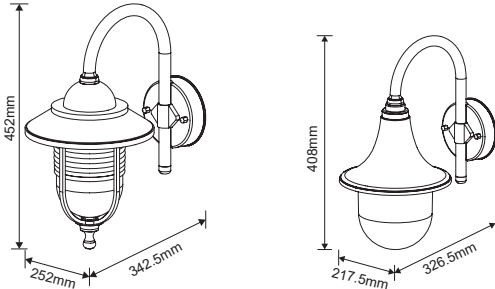

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P382-E27	E27 MAX. 40W	n/a	n/a	AC220-240V	342.5x252x452mm	n/a
P222-E27	E27 MAX. 40W	n/a	n/a	AC220-240V	326.5x217.5x408m	n/a

OUTDOOR
WALL LANTERN




P816-E27



P216-E27

- PP housing & Clear PC diffuser.
- UV resistant material.
- Anti-corrosion.
- Available with different finishes.

Available color:

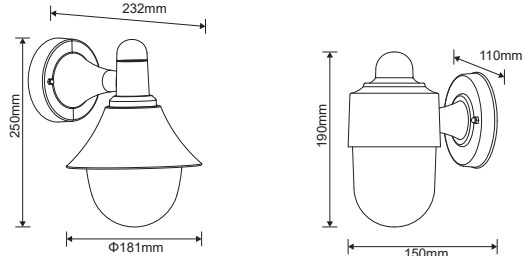

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P816-E27	E27 MAX. 40W	n/a	n/a	AC220-240V	181x232x250mm	n/a
P216-E27	E27 MAX. 9W	n/a	n/a	AC220-240V	110x150x190mm	n/a

OUTDOOR
WALL LANTERN




PW296-E27



P416-E27

- PP housing & Clear PC diffuser.
- UV resistant material.
- Anti-corrosion.
- Available with different finishes.

Available color:

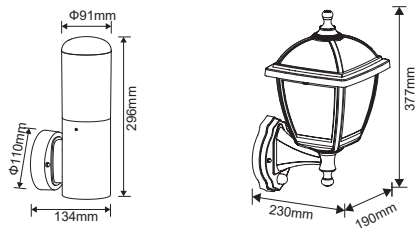

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
PW296-E27	E27 MAX. 40W	n/a	n/a	AC220-240V	91x134x296mm	n/a
P416-E27	E27 MAX. 60W	n/a	n/a	AC220-240V	230x190x377mm	n/a

OUTDOOR
WALL LANTERN



P211-E27




P214-E27



P215-E27

- PP housing & Opal/Clear PC diffuser.
- UV resistant material.
- Anti-corrosion.
- Available with different finishes.

Available color:

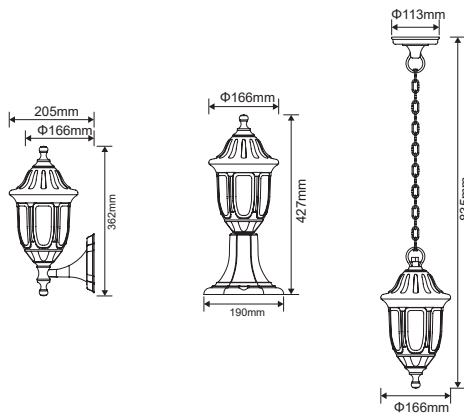

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
P211-E27	E27 MAX. 60W	n/a	n/a	AC220-240V	Φ166x205x362mm	n/a
P214-E27	E27 MAX. 60W	n/a	n/a	AC220-240V	Φ166x190x427mm	n/a
P215-E27	E27 MAX. 60W	n/a	n/a	AC220-240V	Φ166x113x835mm	n/a

OUTDOOR
WALL LIGHT



373 AWU



373 AWU-2



373 AWU+SEN



373 AWU-2+SEN

- Aluminum housing & PC diffuser.
- HF sensor version available.
- COB chip.
- Color: Black.

▶ Microwave sensor



Max.7m



10S-4min



Detection angle:
90°

Override function



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
373 AWU	6.5W	365lm	3000/4000/6500K	AC110-240V	155x90x175mm	Isolated
373 AWU-2	12W	708lm	3000/4000/6500K	AC110-240V	155x90x240mm	Isolated
373 AWU+SEN	7.5W	365lm	3000/4000/6500K	AC110-240V	162x90x206mm	Isolated
373 AWU-2+SEN	13W	708lm	3000/4000/6500K	AC110-240V	162x90x308mm	Isolated

OUTDOOR
BOLLARD LIGHT



373 PSH0.5



373 PSH0.5+SEN



- Aluminum housing & PC diffuser.
- HF sensor version available.
- COB chip.
- Color: Black.

▶ Microwave sensor



Max.7m



10S-4min



Detection angle:
90°

Override function



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
373 PSH0.5	6.5W	370lm	3000/4000/6500K	AC110-240V	140x140x500mm	Isolated
373 PSH0.8	6.5W	350lm	3000/4000/6500K	AC110-240V	140x140x800mm	Isolated
373 PSH0.5+SEN	7.5W	370lm	3000/4000/6500K	AC110-240V	140x140x500mm	Isolated
373 PSH0.8+SEN	7.5W	350lm	3000/4000/6500K	AC110-240V	140x140x800mm	Isolated

OUTDOOR
WALL LIGHT




- Stainless steel housing & PC diffuser.
- Anti-corrosion.
- HF sensor version available.

Available color:



▶ Microwave sensor

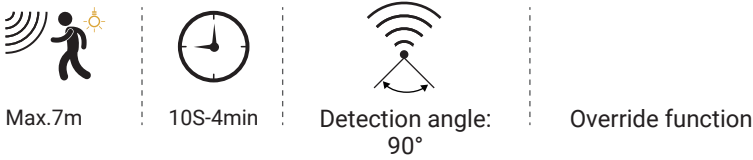

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
848 G WU-3	12W	600lm	3000/4000/6500K	AC110-240V	76x76x342mm	Isolated
848 G AWU-3	12W	600lm	3000/4000/6500K	AC110-240V	128x85x254mm	Isolated
848 G BWU-3	12W	600lm	3000/4000/6500K	AC110-240V	103x76x254mm	Isolated
848 G WU+SEN-3	12W	600lm	3000/4000/6500K	AC110-240V	84x76x342mm	Isolated
848 G AWU+SEN-3	12W	600lm	3000/4000/6500K	AC110-240V	137x85x254mm	Isolated
848 G BWU+SEN-3	12W	600lm	3000/4000/6500K	AC110-240V	112x76x254mm	Isolated

OUTDOOR
BOLLARD LIGHT




- Stainless steel housing & PC diffuser.
- Anti-corrosion.
- HF sensor version available.

Available color:




▶ Microwave sensor

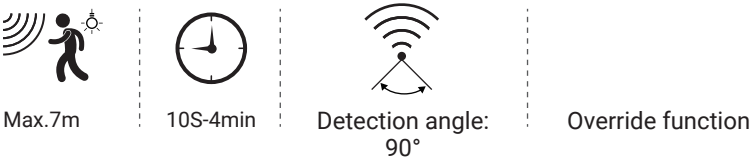

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
848 G PSH0.44-3	12W	600lm	3000/4000/6500K	AC110-240V	118x118x440mm	Isolated
848 G PSH0.76-3	12W	600lm	3000/4000/6500K	AC110-240V	118x118x760mm	Isolated
848 G PSH0.44+SEN-3	12W	600lm	3000/4000/6500K	AC110-240V	118x118x440mm	Isolated
848 G PSH0.76+SEN-3	12W	600lm	3000/4000/6500K	AC110-240V	118x118x760mm	Isolated

OUTDOOR
WALL LIGHT

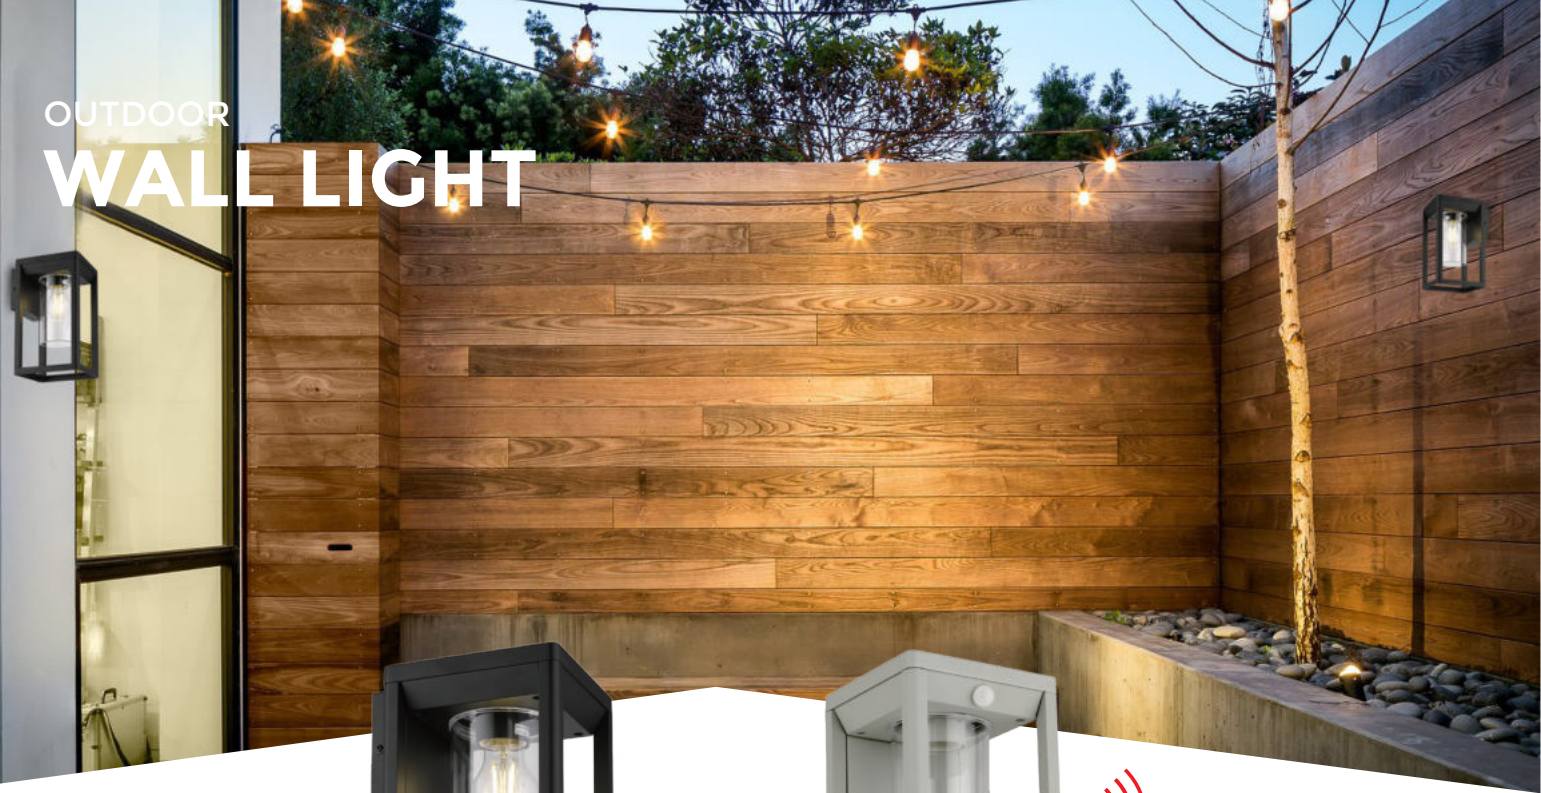

1907 DN



1907 DN+SEN

- Aluminum housing & PC diffuser.
- HF sensor version available.

Available color:



▶ Microwave sensor



2-6m



10S-7min



10-2000lux



Detection angle:
360°



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1907 DN	E27 MAX.15W	n/a	n/a	AC220-240V	165x150x270mm	n/a
1907 DN+SEN	E27 MAX.15W	n/a	n/a	AC220-240V	165x150x270mm	n/a

OUTDOOR
BOLLARD LIGHT



1907 E27 PSH0.5



1907 E27 PSH0.5+SEN

- Aluminum housing & PC diffuser
- Anti-corrosion.
- HF sensor version available.

Available color:



▶ Microwave sensor



2-6m



10S-7min



10-2000lux



Detection angle:
360°



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1907 E27 PSH0.35	E27 MAX.15W	n/a	n/a	AC220-240V	150x150x350mm	n/a
1907 E27 PSH0.5	E27 MAX.15W	n/a	n/a	AC220-240V	150x150x500mm	n/a
1907 E27 PSH0.8	E27 MAX.15W	n/a	n/a	AC220-240V	150x150x800mm	n/a
1907 E27 PSH0.35+SEN	E27 MAX.15W	n/a	n/a	AC220-240V	150x150x350mm	n/a
1907 E27 PSH0.5+SEN	E27 MAX.15W	n/a	n/a	AC220-240V	150x150x500mm	n/a
1907 E27 PSH0.8+SEN	E27 MAX.15W	n/a	n/a	AC220-240V	150x150x800mm	n/a

OUTDOOR
WALL LIGHT



1957 AWU



- Stainless steel housing & PC diffuser.
- Solar panel: 5.5V 0.88W.
- Battery: 18650 3.7V 1200 mAh Li-ion.

▶ Microwave sensor



Max.10m



25S



Detection angle:
110°

▶ Switch function

Long press 3s to start it:

Mode A: After dark, 20lm permanently on.

Long press second time:

Mode B: After dark, 20lm permanently on+change to 85lm when motion detected.
After delay time, return back to 20lm.

Long press third time:

Mode C: After dark, 220lm when motion detected+ OFF if no motion after delay time.

Long press 3s to turn it off



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1957 AWU	2W	220lm	3000/4000/6500K	n/a	142x125x192mm	n/a

OUTDOOR
BOLLARD LIGHT



1957 PSH0.5



- Stainless steel housing & PC diffuser.
- Solar panel: 5.5V 0.88W.
- Battery: 18650 3.7V 1200 mAh Li-ion.

▶ Microwave sensor



Max.10m



25S



Detection angle:
110°

▶ Switch function

Long press 3s to start it:

Mode A: After dark, 20lm permanently on.

Long press second time:

Mode B: After dark, 20lm permanently on+change to 85lm when motion detected.
After delay time, return back to 20lm.

Long press third time:

Mode C: After dark, 220lm when motion detected+ OFF if no motion after delay time.

Long press 3s to turn it off



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1957 PSH0.5	2W	220lm	3000/4000/6500K	n/a	125x125x500mm	n/a
1957 PSH0.8	2W	220lm	3000/4000/6500K	n/a	125x125x800mm	n/a

OUTDOOR
WALL LIGHT



1960 AWU



- Stainless steel housing & PC diffuser.
- Solar panel: 6V 2W.
- Battery: 18650 3.7V 2200 mAh Li-ion.

▶ Microwave sensor



Max.10m



25S



Detection angle:
110°

▶ Switch function

Long press 3s to start it:

Mode A: After dark, 60lm permanently on.

Long press second time:

Mode B: After dark, 60lm permanently on+change to 240lm when motion detected.
After delay time, return back to 60lm.

Long press third time:

Mode C: After dark, 600lm when motion detected+ OFF if no motion after delay time.

Long press 3s to turn it off

Available color:



Black



Silver



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1960 AWU	4.4W	600lm	3000/4000/6500K	n/a	173x160x159mm	n/a

OUTDOOR
BOLLARD LIGHT



1960 PSH0.5



- Stainless steel housing & PC diffuser.
- Solar panel: 6V 2W.
- Battery: 18650 3.7V 2200 mAh Li-ion.

▶ Microwave sensor



Max.10m



25S



Detection angle:
110°

▶ Switch function

Long press 3s to start it:

Mode A: After dark, 60lm permanently on.

Long press second time:

Mode B: After dark, 60lm permanently on+change to 240lm when motion detected.
After delay time, return back to 60lm.

Long press third time:

Mode C: After dark, 600lm when motion detected+ OFF if no motion after delay time.

Long press 3s to turn it off

Available color:



Black



Silver



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1960 PSH0.5	4.4W	600lm	3000/4000/6500K	n/a	160x160x500mm	n/a
1960 PSH0.8	4.4W	600lm	3000/4000/6500K	n/a	160x160x800mm	n/a

OUTDOOR
WALL LIGHT




1966



- Aluminum housing & PC diffuser.
- Solar panel: 6V 2.1W.
- Battery: 18650 3.7V 2200 mAh Li-ion.
- Color: Black.

▶ Microwave sensor

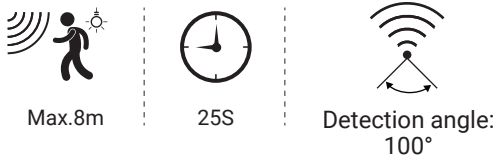

▶ Switch function

Long press 3s to start it:
Mode A: After dark, 60lm permanently on.
Long press second time:
Mode B: After dark, 60lm permanently on+change to 240lm when motion detected.
After delay time, return back to 60lm.
Long press third time:
Mode C: After dark, 600lm when motion detected+ OFF if no motion after delay time.
Long press 3s to turn it off



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1966	4.4W	600lm	3000/4000/6500K	n/a	190x125x80mm	n/a

OUTDOOR
BOLLARD LIGHT



1966 PSH0.5



- Aluminum housing & PC diffuser.
- Solar panel: 6V 2.1W.
- Battery: 18650 3.7V 2200 mAh Li-ion.
- Color: Black.

▶ Microwave sensor



▶ Switch function

Long press 3s to start it:
Mode A: After dark, 60lm permanently on.
Long press second time:
Mode B: After dark, 60lm permanently on+change to 240lm when motion detected.
After delay time, return back to 60lm.
Long press third time:
Mode C: After dark, 600lm when motion detected+ OFF if no motion after delay time.
Long press 3s to turn it off



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1966 PSH0.5	4.4W	600lm	3000/4000/6500K	n/a	188x135x500mm	n/a
1966 PSH0.8	4.4W	600lm	3000/4000/6500K	n/a	188x135x800mm	n/a

OUTDOOR
WALL LIGHT



1950 DN



- Aluminum housing & PC diffuser.
- Solar panel: 6V 2W.
- Battery: 18650 3.7V 2200 mAh Li-ion.
- Color: Black.

Microwave sensor

Max.8m

25S

Detection angle:
100°

Switch function

Long press 3s to start it:
Mode A: After dark, 60lm permanently on.
Long press second time:
Mode B: After dark, 60lm permanently on+change to 240lm when motion detected.
After delay time, return back to 60lm.
Long press third time:
Mode C: After dark, 600lm when motion detected+ OFF if no motion after delay time.
Long press 3s to turn it off


Ra≥80

RoHS

Aluminum

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1950 DN	4.4W	600lm	3000/4000/6500K	n/a	187x160x90mm	n/a

OUTDOOR
BOLLARD LIGHT

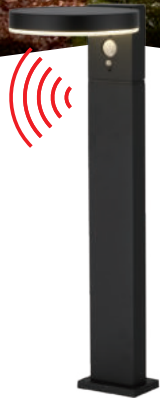

1950 PSH0.5



- Aluminum housing & PC diffuser.
- Solar panel: 6V 2W.
- Battery: 18650 3.7V 2200 mAh Li-ion.
- Color: Black.

Microwave sensor

Max.10m

25S

Detection angle:
110°

Switch function

Long press 3s to start it:
Mode A: After dark, 60lm permanently on.
Long press second time:
Mode B: After dark, 60lm permanently on+change to 240lm when motion detected.
After delay time, return back to 60lm.
Long press third time:
Mode C: After dark, 600lm when motion detected+ OFF if no motion after delay time.
Long press 3s to turn it off

Ra≥80

RoHS

Aluminum

Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1950 PSH0.5	4.4W	600lm	3000/4000/6500K	n/a	202x160x500mm	n/a
1950 PSH0.8	4.4W	600lm	3000/4000/6500K	n/a	202x160x800mm	n/a

OUTDOOR
WALL LIGHT




1951



- Aluminum housing & PC diffuser.
- Solar panel: 6V 2.1W.
- Battery: 18650 3.7V 2200 mAh Li-ion.
- Color: Black.

Microwave sensor

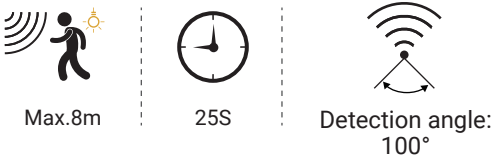

Switch function

Long press 3s to start it:
Mode A: After dark, 60lm permanently on.
Long press second time:
Mode B: After dark, 60lm permanently on+change to 240lm when motion detected.
After delay time, return back to 60lm.
Long press third time:
Mode C: After dark, 600lm when motion detected+ OFF if no motion after delay time.
Long press 3s to turn it off



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1951	4.4W	600lm	3000/4000/6500K	n/a	177x150x90mm	n/a

OUTDOOR
BOLLARD LIGHT




1951 PSH0.5



- Aluminum housing & PC diffuser.
- Solar panel: 6V 2.1W.
- Battery: 18650 3.7V 2200 mAh Li-ion.
- Color: Black.

Microwave sensor

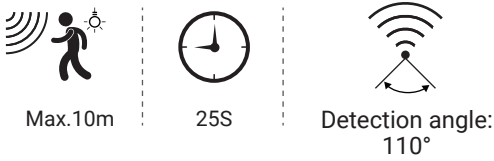


Switch function

Long press 3s to start it:
Mode A: After dark, 60lm permanently on.
Long press second time:
Mode B: After dark, 60lm permanently on+change to 240lm when motion detected.
After delay time, return back to 60lm.
Long press third time:
Mode C: After dark, 600lm when motion detected+ OFF if no motion after delay time.
Long press 3s to turn it off



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1951 PSH0.5	4.4W	600lm	3000/4000/6500K	n/a	210x150x500mm	n/a
1951 PSH0.8	4.4W	600lm	3000/4000/6500K	n/a	210x150x800mm	n/a

OUTDOOR
WALL LIGHT



2064 AWU



- Stainless steel housing & PC diffuser.
- Solar panel: 5V 0.65W.
- Battery: 18650 3.7V 1200 mAh Li-ion.

▶ Microwave sensor



Max.10m



25S



Detection angle:
110°

▶ Switch function

Long press 3s to start it:

Mode A: After dark, 30lm permanently on.

Long press second time:

Mode B: After dark, 30lm permanently on+change to 120lm when motion detected.
After delay time, return back to 30lm.

Long press third time:

Mode C: After dark, 240lm when motion detected+ OFF if no motion after delay time.

Long press 3s to turn it off

Available color:



Black



Silver



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
2064 AWU	1.7W	240lm	3000/4000/6500K	n/a	230x200x335mm	n/a

OUTDOOR
BOLLARD LIGHT



2064 PSH0.5



- Stainless steel housing & PC diffuser.
- Solar panel: 5V 0.65W.
- Battery: 18650 3.7V 1200 mAh Li-ion.

▶ Microwave sensor



Max.10m



25S



Detection angle:
110°

▶ Switch function

Long press 3s to start it:

Mode A: After dark, 30lm permanently on.

Long press second time:

Mode B: After dark, 30lm permanently on+change to 120lm when motion detected.
After delay time, return back to 30lm.

Long press third time:

Mode C: After dark, 240lm when motion detected+ OFF if no motion after delay time.

Long press 3s to turn it off.

Available color:



Black



Silver



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
2064 PSH0.5	1.7W	240lm	3000/4000/6500K	n/a	200x200x500mm	n/a
2064 PSH0.8	1.7W	240lm	3000/4000/6500K	n/a	200x200x800mm	n/a

OUTDOOR
WALL LIGHT



2089 DN



- Stainless steel housing & PC diffuser.
- Solar panel: 5.5V 2.1W.
- Battery: 18650 3.7V 2200 mAh Li-ion.
- Color: Black

► Microwave sensor

Max.10m

25S

Detection angle:
110°

► Switch function

Long press 3s to start it:
Mode A: After dark, 60lm permanently on.

Long press second time:
Mode B: After dark, 60lm permanently on+change to 240lm when motion detected.
After delay time, return back to 60lm.

Long press third time:
Mode C: After dark, 600lm when motion detected+ OFF if no motion after delay time.

Long press 3s to turn it off



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
2089 DN	5.8W	600lm	3000/4000/6500K	n/a	154x107x130mm	n/a

OUTDOOR
BOLLARD LIGHT



2089 PSH0.5



- Stainless steel housing & PC diffuser.
- Solar panel: 5.5V 2.1W.
- Battery: 18650 3.7V 2200 mAh Li-ion.
- Color: Black.

► Microwave sensor

Max.10m

25S

Detection angle:
110°

► Switch function

Long press 3s to start it:
Mode A: After dark, 60lm permanently on.

Long press second time:
Mode B: After dark, 60lm permanently on+change to 240lm when motion detected.
After delay time, return back to 60lm.

Long press third time:
Mode C: After dark, 600lm when motion detected+ OFF if no motion after delay time.

Long press 3s to turn it off.



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
2089 PSH0.5	5.8W	600lm	3000/4000/6500K	n/a	154x107x500mm	n/a
2089 PSH0.8	5.8W	600lm	3000/4000/6500K	n/a	154x107x800mm	n/a

OUTDOOR
WALL LIGHT



146 A+L



146 B+L



146 C+L

- Aluminum housing & Glass diffuser.
- Anti-corrosion.
- Color: Black.



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
146 A+L	GU10 MAX.35W	n/a	n/a	AC220-240V	88x88x165mm	n/a
146 B+L	GU10 MAX.35W	n/a	n/a	AC220-240V	93x88x118mm	n/a
146 C+L	2xGU10 MAX.35W	n/a	n/a	AC220-240V	93x88x162mm	n/a

OUTDOOR
GARDEN SPIKE



- Aluminum housing & Glass diffuser.
- Anti-corrosion.
- Color: Black.



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
114	GU10 MAX.35W	n/a	n/a	AC220-240V	98x98x378mm	n/a

OUTDOOR

BOLLARD LIGHT



2088 PSH0.4



- Aluminum housing & PC diffuser.
- Solar panel: 5.5V 0.88W.
- Battery: 18650 3.7V 1800 mAh Li-ion.
- On-off switch.
- Color: Black.



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
2088 PSH0.4	0.6W	60lm	3000/4000/6500K	n/a	195x195x400mm	n/a
2088 PSH0.8	0.6W	60lm	3000/4000/6500K	n/a	195x195x800mm	n/a

OUTDOOR

BOLLARD LIGHT



1952 PSH0.5



- Aluminum housing & PC diffuser.
- Solar panel: 5.5V 1.7W.
- Battery: 18650 3.7V 2200 mAh Li-ion.
- Color: Black.

► Microwave sensor



Max.8m



25S



Detection angle:
100°

► Switch function

Long press 3s to start it:

Mode A: After dark, 60lm permanently on.

Long press second time:

Mode B: After dark, 60lm permanently on+change to 240lm when motion detected.

After delay time, return back to 60lm.

Long press third time:

Mode C: After dark, 600lm when motion detected+ OFF if no motion after delay time.

Long press 3s to turn it off



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
1952 PSH0.2	4.4W	600lm	3000/4000/6500K	n/a	200x60x200mm	n/a
1952 PSH0.5	4.4W	600lm	3000/4000/6500K	n/a	200x60x500mm	n/a
1952 PSH0.8	4.4W	600lm	3000/4000/6500K	n/a	200x60x800mm	n/a

OUTDOOR
BOLLARD LIGHT



- Stainless steel housing & PC diffuser.
- Solar panel: 6V 3.6W.
- Battery: 18650 3.7V 4x2200 mAh Li-ion.
- Color: Silver.

► Switch function

Long press 3s to start it:

Mode A: After dark, 45lm permanently on.

Long press second time:

Mode B: After dark, 180lm permanently on.

Long press third time:

Mode C: After dark, 450lm permanently on.

Long press 3s to turn it off.



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
2146 SET3	3.15W	450lm	3000/4000/6500K	n/a	120x76x500mm	n/a

OUTDOOR
GARDEN SPIKE



- Aluminum housing & Glass diffuser.
- Solar panel: 6V 3.6W.
- Battery: 18650 3.7V 4x2200 mAh Li-ion.
- Color: Black.

► Switch function

Long press 3s to start it:

Mode A: After dark, 45lm permanently on.

Long press second time:

Mode B: After dark, 180lm permanently on.

Long press third time:

Mode C: After dark, 450lm permanently on.

Long press 3s to turn it off



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
2150 SET3	3.15W	450lm	3000/4000/6500K	n/a	90x60x250mm	n/a

OUTDOOR
PORTABLE LIGHT



2075-H250



- Aluminum housing & PC diffuser.
- Solar panel: 5V 1.75W.
- Battery: 18650 3.7V 2x2200 mAh Li-ion.
- Including 1m USB cable.

► Switch function

Long press 3s to start it:

Mode A: After dark, 32lm permanently on.

Long press second time:

Mode B: After dark, 140lm permanently on.

Long press third time:

Mode C: After dark, 350lm permanently on.

Long press 3s to turn it off



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
2075-H250	n/a	350lm	3000/4000/6500K	DC5V	150x150x250mm	n/a
2075-H350	n/a	350lm	3000/4000/6500K	DC5V	150x150x350mm	n/a
2075-H450	n/a	350lm	3000/4000/6500K	DC5V	150x150x450mm	n/a

Available color:



OUTDOOR
PORTABLE LIGHT



2110 PSH0.25

- Aluminum housing & PC diffuser.
- Touch dimming switch: 40/160/400lm.
- Battery: 18650 3.7V 2x2200mAh Li-ion.
- Including 1m USB cable.
- Color: Black.



Item	Wattage	Lumen	CCT	Volt	Dimension	Driver
2110 PSH0.25	3W	400lm	3000/4000/6500K	DC5V	136x136x250mm	n/a
2110 PSH0.3	3W	400lm	3000/4000/6500K	DC5V	136x136x300mm	n/a
2110 PSH0.35	3W	400lm	3000/4000/6500K	DC5V	136x136x350mm	n/a